


# Pre-heater

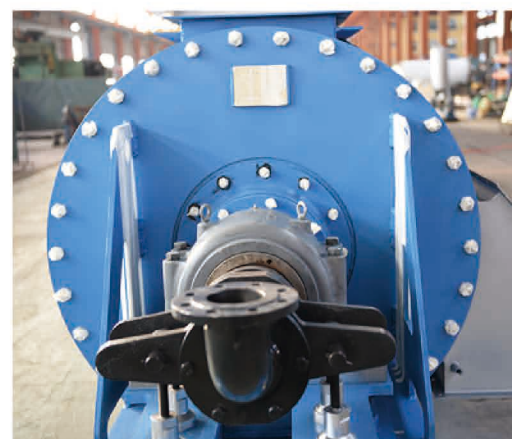

Sensitar Pre-heater is ideal for rendering and fishmeal processing, with inputs of varying quality and composition, requiring minimal pre-cooking preparation. Customers can freely choose the type of equipment in the production range of 2-50t/h, and the steam supply regulator can easily handle even small volumes of steam when needed.

Type	Capacity(t/h)	Dimensions(mm)			Weight (metric ton)
		Length	Height	Width	
FC0605	2.6-3.5	3350	1050	1200	4
FC0806	6.4-8.0	8250	1850	1850	12
FC0808	8.8-11.0	10200	1850	1850	14
FC1108	12.8-16.0	10900	2350	2200	20
FC1110	16.0-20.0	12800	2350	2200	23
FC1112	20.0-25.0	14850	2350	2200	27
FC1310	20.0-25.0	13050	2450	2200	32
FC1312	24.0-30.0	15050	2450	2200	36
FC1314	28.0-35.0	17050	2450	2200	40
FC1612	30.4-38.0	15150	3450	2400	40
FC1614	35.2-44.0	17150	3450	2400	47
FC1616	40.0-50.0	19150	3450	2400	55