


预煮机 Continuous Cooker

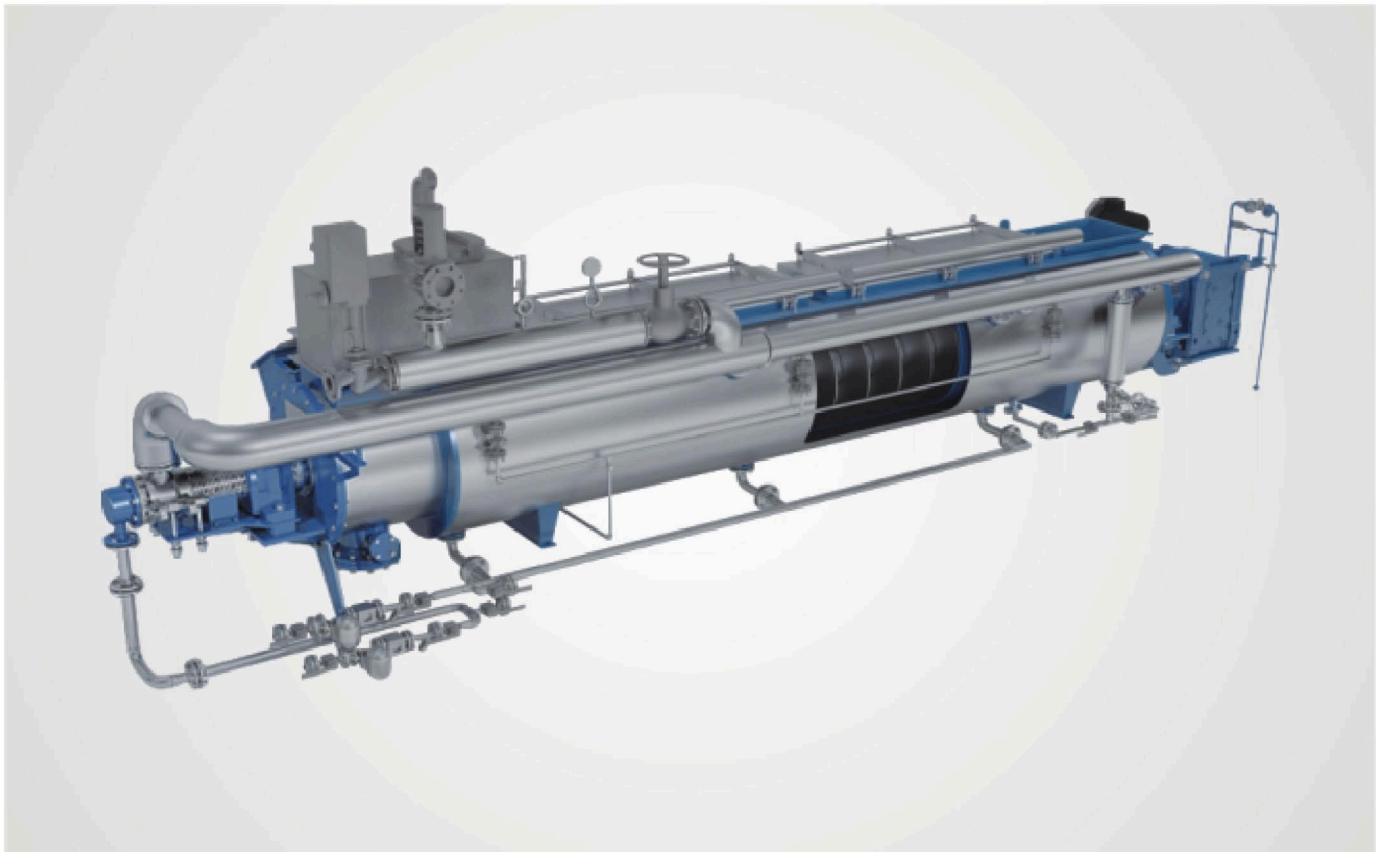

Application

The indirect cookers are applied in processes where high yield from raw material of variable quality and composition is required. Fish meal and turkey offal are examples of such processes.

适用范围

间接蒸煮机主要用于处理需从高质量的原料得到高产率和结构要求较高的地方。例如鱼粉和火鸡内脏。

Cooker Type	Capacity (t/h)	Dimensions(mm)			Weight (metric ton)
		Length	Height	Width	
XFC0605	2.6-3.5	3350	1050	1200	4
XFC0806	6.4-8.0	8250	1850	1850	12
XFC0808	8.8-11.0	10200	1850	1850	14
XFC1108	12.8-16.0	10900	2350	2200	20
XFC1110	16.0-20.0	12800	2350	2200	23
XFC1112	20.0-25.0	14850	2350	2200	27
XFC1310	20.0-25.0	13050	2450	2200	32
XFC1312	24.0-30.0	15050	2450	2200	36
XFC1314	28.0-35.0	17050	2450	2200	40
XFC1612	30.4-38.0	15150	3450	2400	40
XFC1614	35.2-44.0	17150	3450	2400	47
XFC1616	40.0-50.0	19150	3450	2400	55